
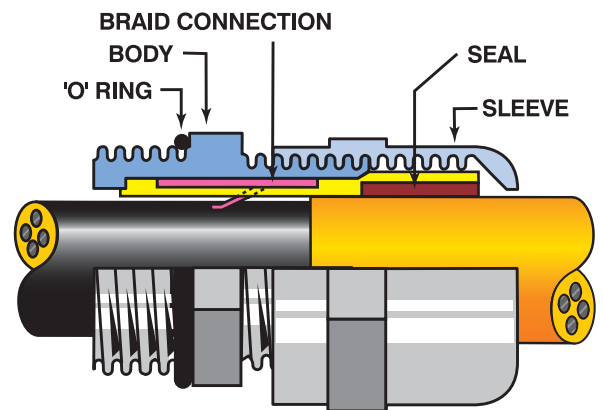


# Alco

## EMC Cable Glands

<b>Applications</b>	For indoor or outdoor use
<b>Function</b>	Provides seal on cable sheath and contact between screen to earth (body)
<b>Approvals</b>	IP68 (50m)
<b>Range</b>	EMC12-EMC63L
<b>Material</b>	Brass, Nickel Plated
<b>Locknut</b>	Supplied as standard
<b>Seal</b>	Neoprene
<b>O Ring</b>	NBR
<b>Temperature Range</b>	-40°C to +100°C

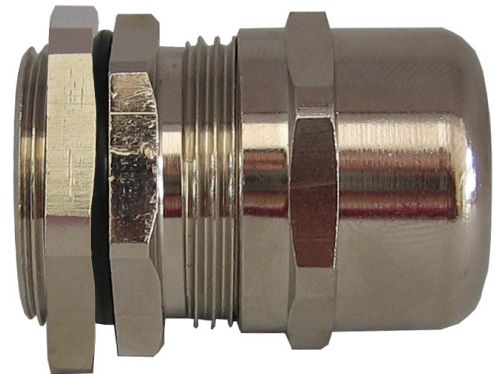

### SPECIFICATIONS:

PART NUMBER	CABLE SEALING RANGE (MM)		THREAD DIAMETER x LENGTH	MIN SHIELDED DIAMETER	DIAMETER ACROSS FLATS	ORANGE SHROUD*		BOX QTY
	MIN	MAX				PVC	SILICON	
EMC12	3.0	6.5	M12 x 12	2.0	14	-	**	10
EMC16	5.0	10.0	M16 x 12	3.5	20	-	ALCSG0S	10
EMC20S	6.0	12.0	M20 x 6	4.5	24	ALCSG1	ALCSG1S	10
EMC20	7.5	14.0	M20 x 12	5.5	22	ALCSG1	ALCSG1S	10
EMC25	10.0	18.0	M25 x 12	7.0	30	ALCSG2	ALCSG2S	10
EMC32	16.0	25.0	M32 x 15	12.0	40	ALCSG3	ALCSG3S	5
EMC40	22.0	32.0	M40 x 15	18.0	50	ALCSG4	ALCSG4S	5
EMC50	30.0	38.0	M50 x 15	26.0	58	ALCSG5	ALCSG5S	1
EMC63	34.0	44.0	M63 x 15	30.0	68	ALCSG6	ALCSG6S	1
EMC63L	41.0	53.0	M63 x 10	33.0	75	ALCSG6	ALCSG6S	1

\* For Black Shroud add 'B' to part number: e.g. ALCSG3SB. Note: Mounting thread pitch 1.5mm, unless otherwise specified. Available in stainless steel upon request. See product and or website for fitting instructions.

\*\*No suitable shroud available, use HSTNW18/9 size heatshrink instead. NPT and PG fittings available upon request, lead times apply. See website for fitting instructions. # All dimensions in mm unless otherwise specified.

## Wattmaster

THE BRAND ELECTRICIANS RELY ON

T: 1300 300 747 F: 1300 300 074

www.wattmaster.com.au