

Alco

General Purpose Nylon Glands for Unarmoured Cable

Features:

- For indoor or outdoor use
- Easy to assemble for use with unarmoured cables
- Provides superior seal on cable sheath and enclosure
- Halogen Free
- UV protected (black only)
- Seals available to suit 1.5, 2.5 & 4.0mm twin and earth TPS cable (ALCMG20 and ALCMG25 only)
- Comes complete with locknut

Material: Body & Cap - Polyamide PA6 (Nylon)


Seal & Washer - black chloroprene

Approvals: IP66/68 (5 bar)

Flammability: V2 to UL 94

Operating Temperature: Permanent -20°C to +100°C

Intermittent up to 150°C

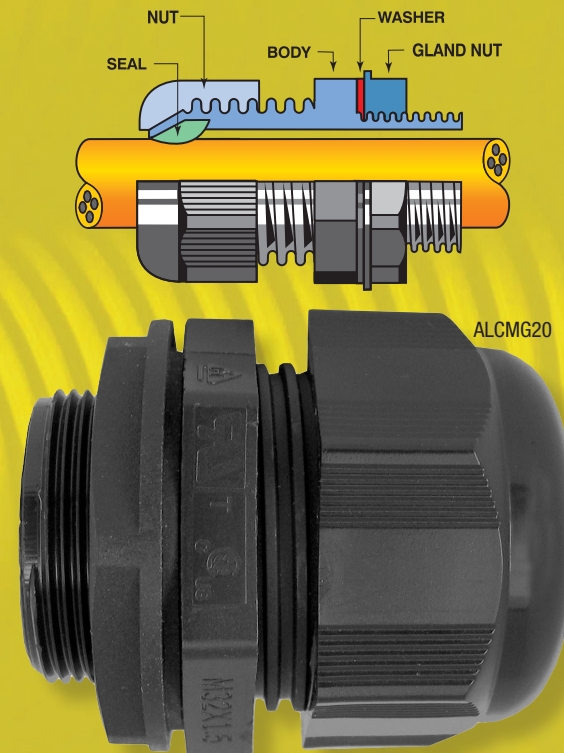

| Cat. No. | Thread Diameter | Cable Range | Diameter Across Flats | Colour | Orange Shroud* | | Box Qty |
|----------|-----------------|-------------|-----------------------|--------|----------------|----------|---------|
| | | | | | PVC | Silicon | |
| ALCMG12 | M12 x 8 | 3 - 6.5mm | 15mm | Black | - | - | 40 |
| ALCMG16 | M16 x 15 | 5 - 10mm | 22mm | Black | ALCSG1 | ALCSG1S | 25 |
| ALCMG20 | M20 x 15 | 10 - 14mm | 27mm | Black | ALCSG2 | ALCSG2S | 25 |
| ALCMG25 | M25 x 15 | 11 - 17mm | 29mm | Black | ALCSG2L | ALCSG2LS | 15 |
| ALCMG32 | M32 x 15 | 18 - 25mm | 42mm | Black | - | ALCSG3L | 5 |
| ALCMG40 | M40 x 18 | 22 - 32mm | 53mm | Black | ALCSG5 | ALCSG5S | 4 |
| ALCMG50 | M50 x 18 | 30 - 38mm | 60mm | Black | ALCSG5 | ALCSG5S | 2 |
| ALCMG63 | M63 x 18 | 38 - 47mm | 65mm | Black | ALCSG6 | ALCSG6S | 2 |
| ALCMG75 | M75 x 25 | 48 - 55mm | 80mm | Grey | - | ALCSG7S | 5 |

*For Black Shroud add 'B' to part number: e.g. ALCSG3SB. Note: Mounting thread pitch 1.5mm unless otherwise specified.



Follow us In Instagram
@Alco.cableglands



Follow us In Instagram
@alco_cableglands

KLEIN TOOLS
EST. 1857

AUSTRALIA &
NEW ZEALAND

www.wattmaster.com.au
www.kleintoolsnz.com