

Alco


Pre-Insulated Bootlace Terminals



PART NUMBER	CONDUCTOR SIZE (mm ²)	DIMENSIONS (MM)				PACK QTY	COLOUR
		L	F	C	W		
ALCBLV/100	0.25	10.0	6.0	0.75	1.9	100	Violet
ALCBLP/100	0.34	10.0	6.0	0.8	1.9	100	Pink
ALCBLW/100	0.5	12.0	8.0	1.3	3.3	100	White
ALCBLB/100	0.75	14.8	8.0	1.5	3.5	100	Blue
ALCBLR/100	1.0	12.6	8.0	1.7	3.7	100	Red
ALCBLY/100	1.0	14.5	8.0	1.7	3.7	100	Yellow
ALCBLBK/100	1.5	14.5	8.0	2.0	4.0	100	Black
ALCBLGY/100	2.5	15.8	8.0	2.6	4.9	100	Grey
ALCBLO/100	4.0	16.5	10.0	3.2	5.5	100	Orange
ALCBLG/50	6.0	20.5	12.0	3.9	7.0	50	Green
ALCBLG-18/50	6.0	26.0	18.0	3.5	6.3	50	Green
ALCBLBR/50	10.0	22.0	12.0	4.5	7.6	50	Brown
ALCBLBR-18/50	10.0	28.0	18.0	4.5	7.6	50	Brown
ALCBLI/50	16.0	24.0	12.0	5.8	8.8	50	Ivory
ALCBLI-18/40	16.0	28.0	18.0	5.8	8.8	40	Ivory
ALCBLBK25/25	25.0	30.0	16.0	8.3	12.7	25	Black
ALCBLR35/20	35.0	30.0	16.0	8.3	12.7	20	Red
ALCBLB50/10	50.0	36.0	20.0	10.3	15.0	10	Blue
ALCBLY70/7	70.0	37.0	21.0	13.5	16.0	7	Yellow
ALCBLR95/5	95.0	44.0	25.0	14.7	18.0	5	Red
ALCBLB120/4	120.0	48.0	27.0	16.7	20.0	4	Blue
ALCBLY150/3	150.0	58.0	32.0	19.5	23.0	3	Yellow

FEATURES:

- Pre-insulated bootlace terminals
- Provide precise terminations to multi-stranded cable
- Reduces possibility of short-circuiting and ensures no strands stray
- Colour-coded Polyamide insulation for easy identification
- Halogen free
- 600V max
- Operating Temperature: +105°C

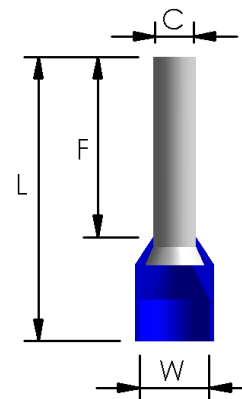

Like us on Facebook
@Alco.cableglands

Follow us on Instagram
@alco_cableglands

KLEIN TOOLS
AUSTRALIA



P: 1300 300 747
www.wattmaster.com.au