
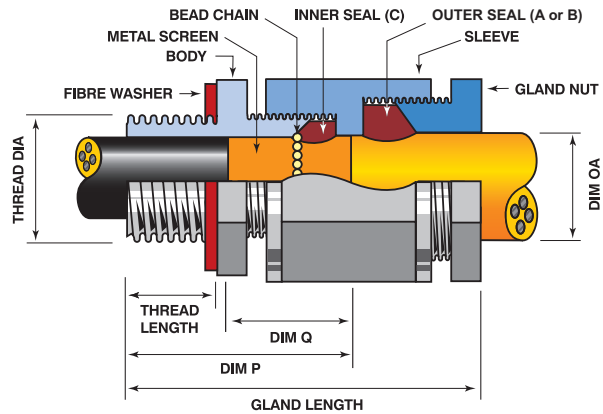


# Alco

## ALCEMC Cable Glands

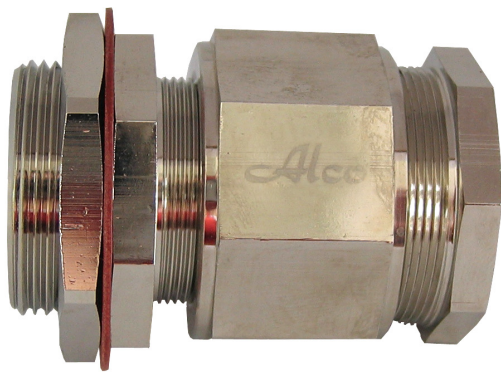

<b>Applications</b>	For indoor or outdoor use
<b>Function</b>	Provides seal on cable sheath and contact between screen and earth (body)
<b>Approvals</b>	Degree of protection against ingress of water IP66/68 (30m)
<b>Standards</b>	AS 1939-1990
<b>Range</b>	ALCEMC12-ALCEMC75C
<b>Material</b>	Brass, Nickel Plated
<b>Locknut</b>	Supplied as standard
<b>Seal</b>	TPE
<b>Temperature Range</b>	-20°C to +80°C

### SPECIFICATIONS:

PART NUMBER	SEALING RANGE (MM)						THREAD DIAMETER x LENGTH	GLAND DIAMETER		GLAND LENGTH		DIM 'P'	DIM 'Q'	TORQUE (NM)	ORANGE SHROUD*		BOX QTY
	SEAL B (THICK)		SEAL A (THIN)		OVERSCREEN			ACROSS FLATS	ACROSS POINTS	UNCOMPRESSED	COMPRESSED				PVC	SILICON	
	OA MIN	OA MAX	OA MIN	OA MAX	OS MIN	OS MAX											
ALCEMC12	5.8	7.5	7.5	10.0	4.0	7.5	M12 x 12	17.5	18.9	55	40	35	12	5	-	ALCSG0S	20
ALCEMC16	-	-	8.2	13.0	6.5	10.5	M16 x 12	27.5	29.8	58	43	40	14	9	ALCSG2	ALCSG2S	20
ALCEMC20	-	-	13.0	17.0	10.0	14.0	M20 x 12	32.5	35.2	58	43	40	14	13	-	ALCSG2L	20
ALCEMC25	-	-	17.5	22.0	14.0	18.0	M25 x 12	37.5	40.6	61	45	40	14	21	ALCSG3	ALCSG3S	15
ALCEMC32	-	-	22.0	26.0	18.0	22.5	M32 x 12	37.5	40.6	62	46	40	14	34	ALCSG3	ALCSG3S	5
ALCEMC40	26.0	30.0	30.0	33.5	22.5	30.0	M40 x 15	47.5	51.4	72	54	49	16	53	ALCSG4	ALCSG4S	5
ALCEMC50	33.0	36.0	36.0	42.0	30.0	37.0	M50 x 15	57.5	62.6	80	60	55	20	83	ALCSG5	ALCSG5S	3
ALCEMC63	41.0	46.0	46.0	50.0	38.0	46.0	M63 x 19	70.0	75.8	96	75	69	26	132	ALCSG6	ALCSG6S	2
ALCEMC75A	-	-	48.0	56.0	45.0	52.0	M75 x 19	85.0	92.0	105	80	69	26	188	-	ALSG7S	1
ALCEMC75B	-	-	56.0	64.0	53.0	60.0	M75 x 19	85.0	92.0	111	83	75	29	188	-	ALSG7S	1
ALCEMC75C	-	-	62.0	69.0	58.0	65.0	M75 x 19	85.0	92.0	113	85	75	29	188	-	ALSG7S	1

\* For Black Shroud add 'B' to part number: e.g. ALCSG3SB. Note: Mounting thread is metric with pitch 1.5mm, unless otherwise specified. Spare seals and bead chains also available (lead time and MOQ applies). See website for fitting instructions. # All dimensions in mm unless otherwise specified.

# Wattmaster

THE BRAND ELECTRICIANS RELY ON

T: 1300 300 747 F: 1300 300 074

www.wattmaster.com.au