

# Alco

## Unarmoured Weatherproof Cable Glands

- For indoor or outdoor use
- Clamps and seals on outer cable surface
- Compliance with IEC62444
- Complies with protection types Anchorage CAT B & Impact CAT 8
- Degree of protection against ingress of water IP66/68 30m
- Locknut is supplied as standard


**Material:** Brass, Nickel Plated

**Seal:** TPE

**Temperature Range:**

ALCUA16 - ALCUA32: -20°C to +125°C


ALCUA110: -20°C to +80°C

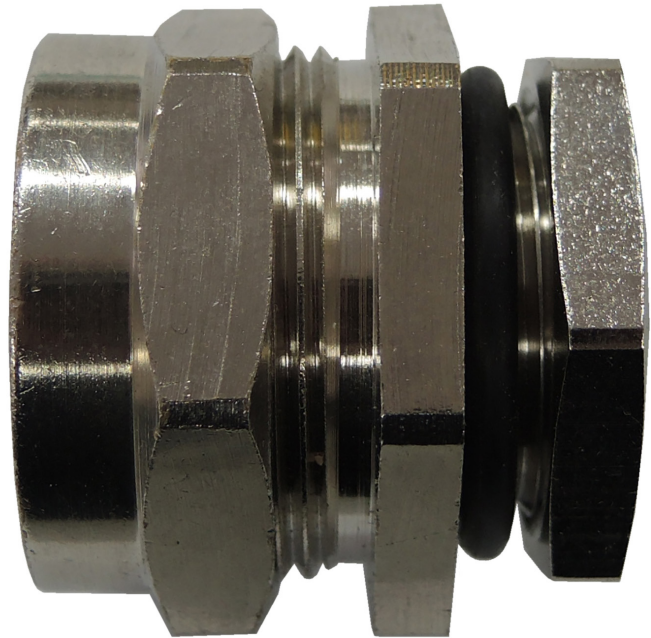

Part Number	Thread Diameter X Length	Pitch	Gland Diameter		Gland Length Max	Projected Length Max	Cable Details		Orange Shroud*		Box Qty
			Across Flats	Across Points			OA Min	OA Max	PVC	Silicon	
ALCUA16	M16 x 10	1.5	24	26.5	31.0	21.0	5.0	12.0	ALCSG1	ALCSG1S	20
ALCUA20A	M20 x 10	1.5	24	26.5	31.0	21.0	5.0	12.0	ALCSG1	ALCSG1S	20
ALCUA20	M20 x 10	1.5	27	30	32.0	22.0	10.5	15.5	ALCSG2	ALCSG2S	20
ALCUA25	M25 x 10	1.5	35	35	31.0	21.0	14.5	20.5	ALCSG2L	ALCSG2LS	15
ALCUA32	M32 x 12	1.5	41	45	36.0	24.0	19.0	27.0	ALCSG3	ALCSG3S	10
ALCUA110	M110 x 25	2.0	125	133	100.0	75.0	88.0	100.0	-	-	1

\* For Black Shroud add 'B' to part number: e.g. ALCSG3SB. Note: Spare seals also available (lead time and MOQ applies). See website for fitting instructions. # All dimensions in mm unless otherwise specified.

 Like us on Facebook  
@Alco.cableglands

 Follow us on Instagram  
@alco\_cableglands

**KLEIN TOOLS**  
AUSTRALIA



P: 1300 300 747  
[www.wattmaster.com.au](http://www.wattmaster.com.au)